


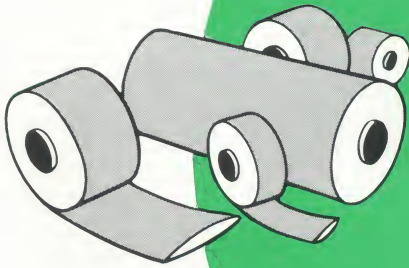
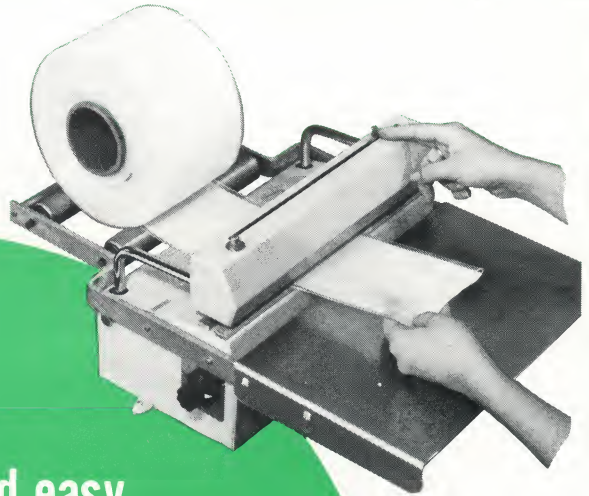


# AUDION IMPULSE SEALERS

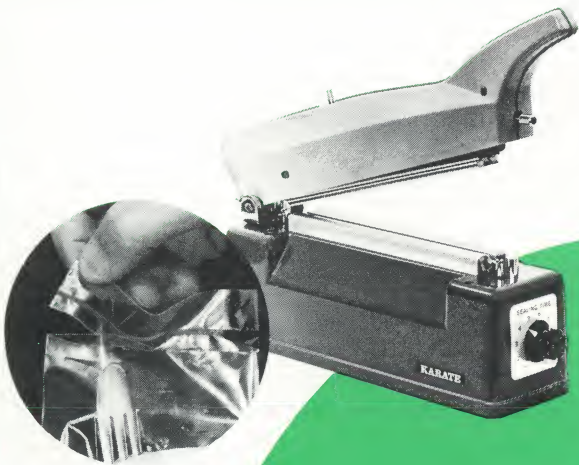

Safe, reliable and easy to use with minimum maintenance, AUDION sealers and bag-makers help you get the job done with air-tight seals at a lower cost than you thought possible...

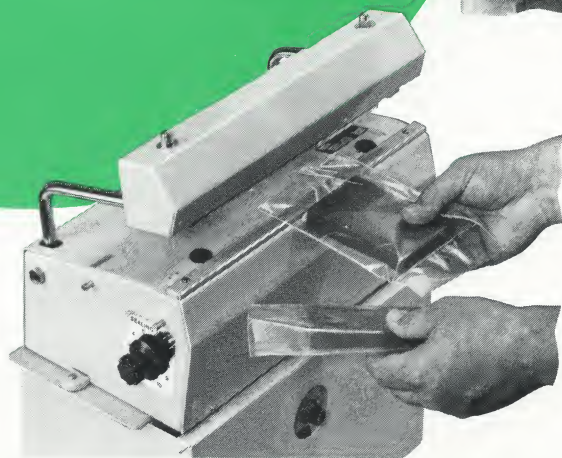

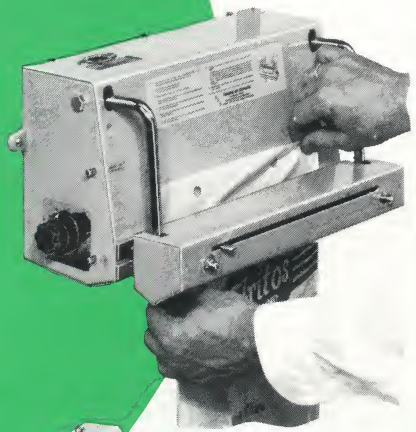

# THE AUDION IMPULSE SEALING SYSTEM FOR BETTER PLASTIC BAG SEALING AND BAG MAKING

What's special about AUDION? The key word is "impulse" — with AUDION the heat's on *only* during sealing.

You go to work right away; no 10 or 20 minutes warm-up. Electricity is consumed only while sealing. There's no burn danger, to operator or merchandise — and no wasted film, because the Sealer's *cool* between cycles. And, with timer-regulation, even an untrained operator can produce strong, perfect seals every time.

Sealing time is 1/2-second and up, depending on film. And what a variety AUDION handles! Thin film, very heavy gauge . . . most mil-spec transparent thermoplastics; nylon, polyethylene, you name it!

All Sealers feature resilient silicone rubber in the toparm and teflon-covered snap-out sealing bars or elements. Parts are easily replaceable, readily available.

And most models are offered with optional *knife*. You can make your own bags!

**Bag making.** Ever ordered 100 poly bags, to find you must buy 5,000? Held up an order for want of the right size bag? Then you can appreciate a Sealer that makes bags!

Heat Sealers do not, *cannot*, offer the convenience of a knife, yet this is a most useful item, helpful with storage, shipping, inventory and many other problems.

**Manual to semi-automatic.** AUDION offers a variety of models according to your needs. Besides manual and footpedal models there are special *Stands* adapting Sealers to semi-automatic air or motor operation.

Special uses, too! There's a model for retail stores (PRONTO) and a manual unit (KARATE) that perforates as well as cuts. Indeed, we probably have your "right" Sealer. But if we don't we'll say so — and tell you who has!

**Nationwide service.** Fast and effective, through AUDION jobbers in major industrial centers. And if you have any problems, just send us film or bag samples and the details. We'll be happy to advise!







As a progressive firm, AUDION constantly improves the line. Hence, all specifics herein may be changed without notice.

## Major Audion Users

A.C. Spark Plug  
Aerojet General Corp.  
Allied Chemical  
AMP  
Armour Meat  
Bank of America  
Beechnut  
Bethlehem Steel  
B.F. Goodrich  
Boeing Aircraft  
Burndy  
Chrysler  
Cutter Laboratories  
Dole Corp.  
Douglas Aircraft  
Dupont  
Dymo Industries  
Emerson Electric Corp.

Frito-Lay  
General Dynamics  
General Electric  
Goodyear  
Grumman Aircraft  
Hercules Powder Corp.  
I.B.M.  
Johnson & Johnson  
Kaiser Jeep  
Lockheed  
Mallinckrodt Chem. Works  
McDonnell Aircraft  
Minneapolis-Honeywell  
Monsanto Chemical  
Motorola  
NASA  
North American Aviation  
Nortronics

Philco  
Procter and Gamble  
Raytheon  
R.C.A.  
Resistoflex  
San Francisco City & County Hospital  
San Francisco Lighthouse for the Blind  
Shell Oil  
Stanford University  
Sylvania Electric  
3M Corp.  
Union Carbide Corp.  
U.S. Army  
U.S. Government  
U.S. Air Force  
U.S. Post Office Department  
Varian Associates  
Westinghouse Corp.  
Wiremold Corp.

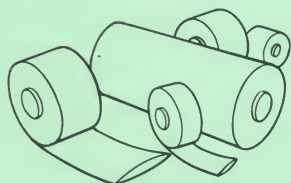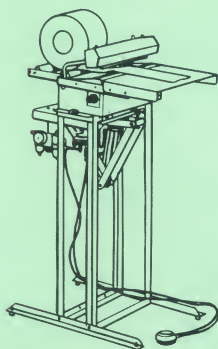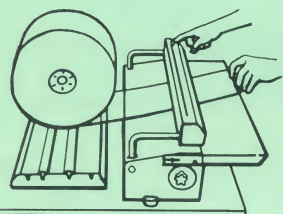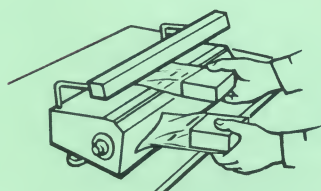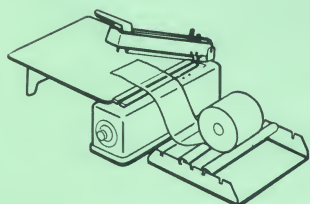

## INDEX

**PRONTO** — manually operated impulse sealer for use in retail stores.

see page 4

**SEALBOY AND SUPER SEALBOYS** — manually operated impulse sealers with or without knife.

see pages 5 and 6

**KARATE** — manually operated impulse sealer that perforates or cuts simultaneously with sealing.

see page 7

**SEALMASTERS AND SUPER SEALMASTERS** — footpedal operated impulse sealers with or without knife, in 3 sealing lengths.

see pages 8 and 9

**SEALMASTER STANDS** — special stands for sealmasters and super sealmasters, for footpedal or semi-automatic air or motor operation.

see pages 10, 11, 12

**AUDIOCONE AND CODESEAL** — a release agent designed for Audion impulse sealers and a method of tamper-proof coding direct into seal.

see page 13

**WORKSHELVES AND ROLLOFLUX** — new workshelf, adjustable to 4 convenient positions, and new rolloflux with ball-bearing rollers.

see page 13

**"WRITE-ON" PLASTIC PARTS BAGS** — pre-printed poly tubing to make see-through, no-loss parts bags.

see page 14

**LAY-FLAT POLYETHYLENE TUBING** — complete listing of sizes and thicknesses available from stock with minimum order only 1 roll.

see page 15



# NEW! PRONTO



*Helps contain shoplifting...  
"Tamperproofs" plastic  
bags at checkout  
or register*

**Easy to mount on wall  
or counter...less than 12" wide**

*Fast, easy, convenient to use*

Ideal for department, drug and hardware stores — wherever maximum efficiency and minimum pilferage loss is desired — PRONTO renders a complete, tamperproof seal in about one second! Far "safer" than stapling — and faster, easier, more convenient.

Easy to mount on walls or counter edges, it's also a snap to use. Your cashier simply inserts the bag (contents down, the natural way) between the jaws, presses gently against the plate; your tamperproof seal is complete. PRONTO!

For automatic regulation of the sealing time the PRONTO is available with an electronic timer, which guarantees that every seal is the same without any possibility of burning.

Less than a foot long, it's a real space-saver. Yet, with its 10" sealing bar, sturdy PRONTO handles plastic bags in all common retail sizes with ease — even bags *bigger* than 10"; just make *two* diagonal seals! (And think of the advertising value of attractive, colorful printed plastic bags!)


PRONTO shares all the advantages of the AUDION Impulse Sealing System. And each unit comes complete with spare sealing bar — just "snap it in."



## PRONTO SPECIFICATIONS

MODEL NUMBER	SEALING LENGTH	WATTAGE	SHIPPING WEIGHT
PRONTO	10"	250	14 lbs.
PRONTO A with timer	10"	250	16 lbs.

# SEALBOY

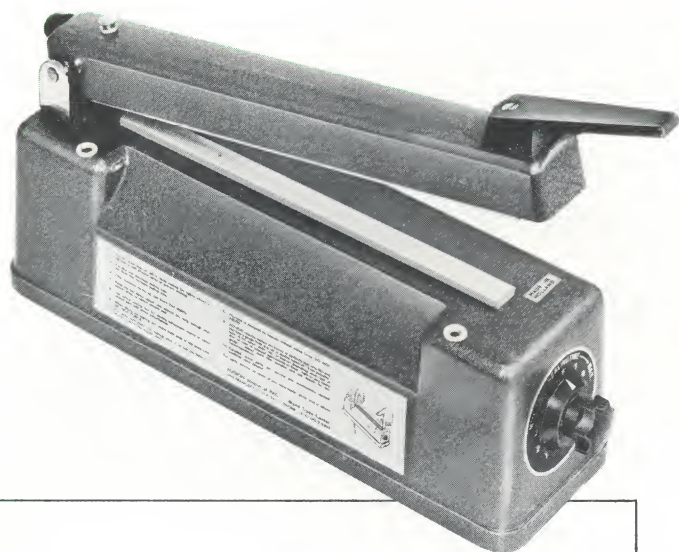

*Manually operated*

## Plastic Bag Sealing

All the advantages of the AUDION Impulse Sealing System. The SEAL-BOY's sealing length (9") is "just right" for perfect manual operation. No burning hazard, either—automatically regulated sealing time (with warning buzzer) sees to that.

Light, sturdy, portable; set it up and use it anywhere. SEALBOYS produce strong, perfect seals on all gauges of film, very thin to the heaviest gauges, time after time.



### SEALBOY SPECIFICATIONS

### ACCESSORIES

MODEL NUMBER	SEALING LENGTH	WATTAGE	SHIPPING WEIGHT	WORK SHELF MODEL #
235-A	9"	175	14 lbs.	330



# SUPER SEALBOYS



*Make your own Poly Bags  
and seal them  
when filled...*

**On the same unit**

*Seal ready-made bags, cutting  
off excess with neat 1/4" skirt*



Ever need 100 Poly Bags and couldn't order less than 5,000? Ever "stuck" for the right size bag? Then you know the problem!

Instead of buying ready-made bags, you can *make them yourself* when and as you need them. To any length desired! The SUPER SEALBOY is the most economical unit combining the AUDION Impulse Sealing System with bag making capability. And the sealing length of 9" is perfect for manual operation.

Other advantages of the SUPER SEALBOY — in common with all units with knife — include better inventory control (packaging predetermined numbers of the same item in Poly Bags) and packaging long or odd-shaped items directly into low-priced poly tubing.

For special applications, and to help increase bag making speed, the SUPER SEALBOY is also available with *twin sealing* — two parallel seals 9/16" apart with the knife cutting between.


Super Sealboy with workshelf and new, improved rolloflux with ball-bearing rollers. This combination makes your bag making simple as A-B-C!

## SUPER SEALBOY SPECIFICATIONS

## ACCESSORIES

MODEL NUMBER	SEALING LENGTH	WATTAGE	SHIPPING WEIGHT	WORK SHELF MODEL #	ROLLOFLUX MODEL #
235-SA	9"	175	14 lbs.	330	145
235-2SA twin sealing	9"	500	15 lbs.	330	145

# NEW! KARATE

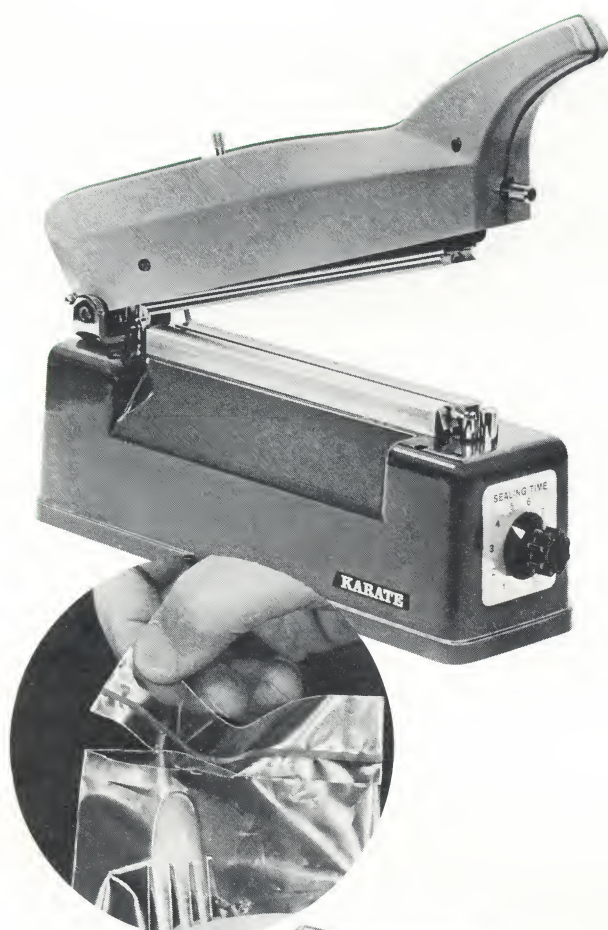

***Faster bag making . . .  
cuts or perforates  
automatically***

***Seal bags and cut off excess***

***Make bags from lay-flat  
tubing, cutting them in the  
same motion, automatically***


***Make an attached series of  
bags, automatically  
perforating in between***

Like the Super Sealboy, the KARATE is made to order for those who very often find it more economical and practical to make their own polyethylene bags from lay-flat tubing. For the modest difference in price, KARATE offers all the advantages of the Super Sealboy *plus*:

1. You can *perforate*, as well as cut.
2. KARATE is *faster*, as it cuts or perforates *automatically*, during the very motion of sealing.

Simple hand controls on the top and one end of the toparm adjust for cutting, perforating or sealing only. And, with KARATE, the sealing element is spring loaded, with floating teflon\* cover.

\* reg. DuPont trademark

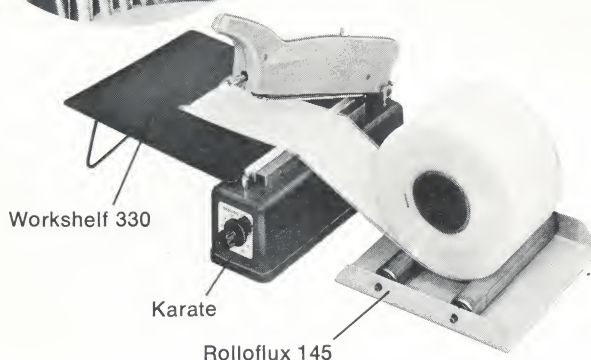

## KARATE SPECIFICATIONS


## ACCESSORIES

MODEL NUMBER	SEALING LENGTH	WATTAGE	SHIPPING WEIGHT	WORK SHELF MODEL #	ROLLOFLUX MODEL #
KARATE	9"	225	19 lbs.	330	145



# SEALMASTERS

***Footpedal operated***  
**Plastic Bag Sealing . . .**  
***faster, easier on operator***  
***In 3 sealing lengths***

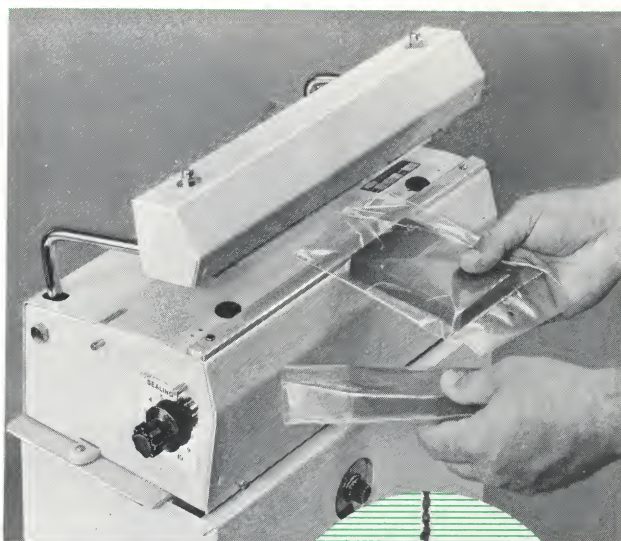

Sealmaster 230-A


All advantages of Audion Impulse Sealing *plus* faster, easier operation! Operator has both hands free, simply presses footpedal to seal bags. Another advantage: open jaws, so you can make continuous seals longer than the unit's sealing length.

In 3 sealing lengths and easily moved about, each SEALMASTER comes complete with Sealing Timer — when the gentle "buzz" stops, the cycle's completed. (SEALMASTER STANDS, especially designed for these units, are available for footpedal, air or motor operation. See this Catalog, pages 10, 11, 12.)

For special applications, one may obtain a specially adapted SEALMASTER in one of the longer sealing lengths, plus interchangeable shorter sealing bars. This helps prevent early burnout of infrequently used bars. For further information on these "combination" units, see page 13.



Sealmaster 230-A

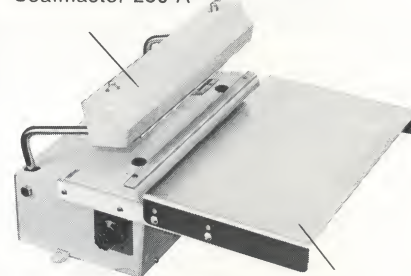

Workshelf 523

Sealmaster with new, improved all-aluminum workshelf. A big 9" deep, workshelf comes in all 3 sealing lengths, adjusts to four convenient positions.

## SEALMASTER SPECIFICATIONS

MODEL NUMBER	SEALING LENGTH	WATTAGE	SHIPPING WEIGHT	WORKSHELF MODEL #
230-A	9"	175	27 lbs.	523
420-A	16½"	375	37 lbs.	642
580-A	23"	425	42 lbs.	758


## ACCESSORIES



# SUPER SEALMASTERS

**Footpedal operated  
with knife  
component . . .**

**For faster,  
easier Plastic  
Bag making  
and Sealing**

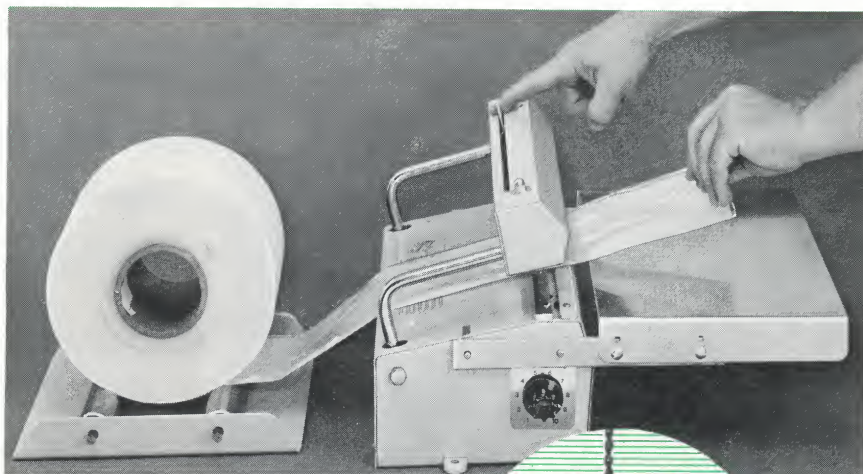

Super Sealmaster 230-SA

The SUPER SEALMASTER brings you all the speed and ease of footpedal operation, all the advantages of Audion Impulse Sealing, *plus* bag making capability. Make them when and as you need them, to any length desired. And get strong, air-and-liquid-tight seals every time!

Like the Sealmaster, the SUPER SEALMASTER comes in 3 sealing lengths, easily adapts to SEALMASTER STANDS for footpedal, air or motor operation. (See pages 10, 11, 12.)

SUPER SEALMASTERS are available with *twin sealing* — there's even an (optional) switch enabling the operator to switch quickly from twin to single seal and back again!




Workshelf 523



Also available: SUPER SEALMASTERS in one of the longer sealing lengths, plus interchangeable shorter sealing bars. See page 13.

Mount vertically for long or bulky objects.

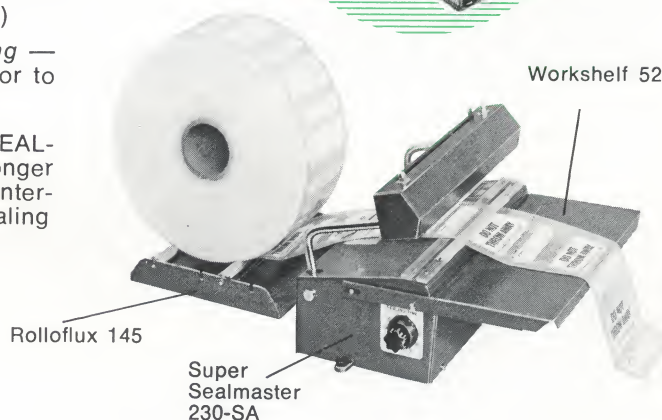

Super Sealmaster with adjustable aluminum workshelf and new, improved rolloflux with ball-bearing rollers. This combination makes your bag making faster and easier than ever before.

## SUPER SEALMASTER SPECIFICATIONS

## ACCESSORIES

MODEL NUMBER	SEALING LENGTH	WATTAGE	SHIPPING WEIGHT	WORKSHELF MODEL #	ROLLOFLUX MODEL #
230-SA	9"	175	27 lbs.	523	145
230-2SA twin sealing	9"	500	29 lbs.	523	145
420-SA	16½"	375	37 lbs.	642	246
420-2SA twin sealing	16½"	725	39 lbs.	642	246
580-SA	23"	425	42 lbs.	758	347
580-2SA twin sealing	23"	925	44 lbs.	758	347




# NEW! SEALMASTER FOOTPEDAL STANDS



SEALMASTER  
FOOTPEDAL STAND

designed for the most efficient possible operation of Sealmaster or Super Sealmaster. So everything — operating height, chain position, footpedal operation—is just right. No "chain hang-up," no "lost" footpedals!

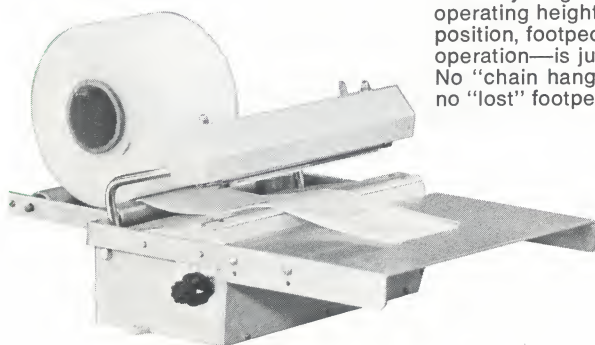

## *Especially designed for Sealmasters and Super Sealmasters in all 3 sizes*

Designed as a perfect fit for each Sealmaster or Super Sealmaster, the SEALMASTER FOOTPEDAL STAND is exactly 31½" high (right for either standing or seated operation) and only 6½" deep — a real space-saver, it frees your bench and table space, too.

Attractively designed and finished in baked enamel, the sturdy, all-steel SEALMASTER FOOTPEDAL STAND fits comfortably into any work setting. With adjustable glides, it's easy to move — and keeps the machine level even when your floor is not.

The SEALMASTER FOOTPEDAL STAND comes in 3 widths, according to sealing length:

- 16" width for 9" sealing length
- 24" width for 16½" sealing length
- 30" width for 23" sealing length

The SEALMASTER FOOTPEDAL STAND may be purchased with your new Sealmaster or Super Sealmaster, or ordered separately, for the unit you already own.

SEALMASTER FOOTPEDAL STANDS in all 3 sizes may be purchased as shown with roll-holder and workshelf. They may also be obtained with workshelf only, or with no "extras."

### SEALMASTER FOOTPEDAL STAND SPECIFICATIONS

### ACCESSORIES

FOR:	CAT. #	SHIPPING WEIGHT	WORK SHELF ONLY CAT. #	WORK SHELF/ROLL HOLDER COMBINATION CAT. #
230 series — 9" seal	2FS	27 lbs.	523	55C
420 series — 16½" seal	4FS	31 lbs.	642	66C
580 series — 23" seal	5FS	34 lbs.	758	77C



# NEW! SEALMASTER AIR STANDS

***NOW! Convert your  
Sealmaster or Super Sealmaster  
to semi-automatic air operation  
with the***

***SEALMASTER AIR STAND!***

***With built-in Air Assembly in  
all 3 sizes***

Take your Sealmaster or Super Sealmaster. Mount it on the SEALMASTER AIR STAND and you've got semi-automatic air operation! A touch on the foot-switch and the unit does the rest — impulse seals, cools, opens.

Easy on the feet, easy on the hands. The Sealing Timer is on the Sealer and all other controls — jaw speed, jaw pressure, dwell — are within easy reach on the Air Assembly. Set them and forget them.

You don't even need the right air pressure! The air regulator maintains your pressure at the proper 30 to 40 lbs.


Exactly 31½" high and only 6½" deep, SEALMASTER AIR STANDS come in 3 widths, according to sealing length:

- 16" width for 9" sealing length
- 24" width for 16½" sealing length
- 30" width for 23" sealing length

The SEALMASTER AIR STAND may be purchased with your new Sealmaster or Super Sealmaster, or ordered separately, for the unit you already own.



Air Assembly is mounted and ready for immediate use in SEALMASTER AIR STAND. Note air regulator, easily reached cycle controls.

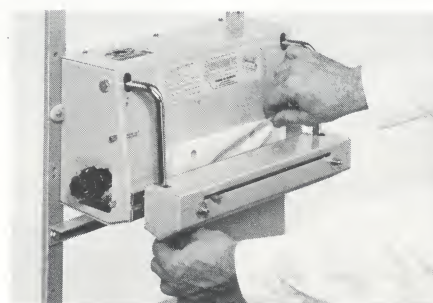

## SEALMASTER AIR STAND SPECIFICATIONS

## ACCESSORIES

FOR:	CAT. #	SHIPPING WEIGHT	WORK SHELF ONLY CAT. #	WORK SHELF/ROLL HOLDER COMBINATION CAT. #
230 series — 9" seal	2AS	40 lbs.	523	55C
420 series — 16½" seal	4AS	44 lbs.	642	66C
580 series — 23" seal	5AS	50 lbs.	758	77C

## NEW! SEALMASTER MOTOR STANDS

***No air supply? Convert to semi-automatic operation with the SEALMASTER MOTOR STAND!***

***Designed for Sealmasters and Super Sealmasters in all 3 sizes***

Even if you lack an air outlet, you can enjoy fully automatic operation with the SEALMASTER MOTOR STAND. Plug it in *anywhere!* Touch the footswitch lightly, let the machine complete the job.

Sealmaster Motor operation requires only two simple adjustments — the Sealing Timer is on the Sealer and dwell (cooling) time is controlled by the solid-state Dwell Timer on the Motor Assembly. Set them once, then forget them.

Equipped with a reliable motor and attractively finished in baked enamel, these all-steel Stands are appropriate for use anywhere. Each SEALMASTER MOTOR STAND is 31½" high and only 6½" deep — the width varies according to sealing length:

- 16" width for 9" sealing length
- 24" width for 16½" sealing length
- 30" width for 23" sealing length

The SEALMASTER MOTOR STAND may be purchased with your new Sealmaster or Super Sealmaster, or ordered separately, for the unit you already own.

Motor Assembly is mounted and ready for immediate use in SEALMASTER MOTOR STAND. Note easily reached solid-state Dwell Timer, convenient footswitch.

SEALMASTER MOTOR STANDS in all 3 sizes may be purchased as shown with roll-holder and workshelf. They may also be obtained with workshelf only, or with *no* "extras."




### SEALMASTER MOTOR STAND SPECIFICATIONS

### ACCESSORIES

FOR:	CAT. #	SHIPPING WEIGHT	WORK SHELF ONLY CAT. #	WORK SHELF/ROLL HOLDER COMBINATION CAT. #
230 series — 9" seal	2MS	38 lbs.	523	55C
420 series — 16½" seal	4MS	45 lbs.	642	66C
580 series — 23" seal	5MS	50 lbs.	758	77C



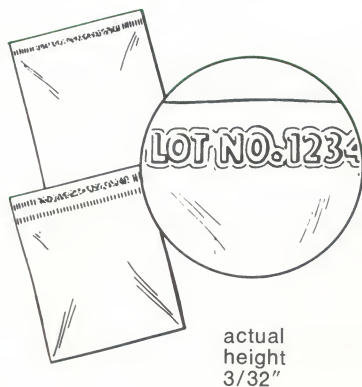

## CODESEAL

CODESEAL provides a tamperproof, properly identified package, imprinted simultaneously with seal. Characters are about 3/32" high, 14 per inch. Samples sent free on request.

## Easy care with AUDIOCONE



AUDIOCONE is a release agent especially designed for Audion Impulse Sealers. It prevents sticking of film to teflon\* or silicone rubber, eliminates build-up of residual film, prolongs teflon cover life. AUDIOCONE will not melt at high nor harden at low temperatures.


\*registered DuPont trademark.

## NEW, IMPROVED WORKSHELF

*Adjusts to 4 convenient positions!*

New all-aluminum workshef, now a healthy 9" deep, is especially designed for Sealmasters and Super Sealmasters. Adjusts to 4 positions as shown, comes to fit all 3 sealing lengths.

Workshelf 523, 9" series:  
Workshelf 642, 16½" series:  
Workshelf 758, 23" series:

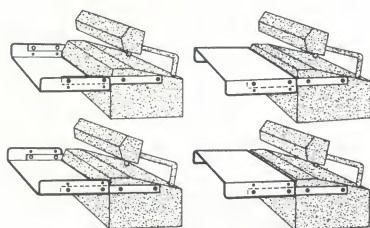

## New, improved ROLLOFLUX with ball-bearing rollers




New Rolloflux with ball-bearing rollers is designed for use with all Audion Impulse Sealers with knife. In 3 sizes. Makes bag making a snap!


Rolloflux 145, 10"  
Rolloflux 246, 16"

Rolloflux 347, 22"


## For SHIPPING For STORAGE For INVENTORY CONTROL




Make your own poly bags, simultaneously packaging odd-lot, odd-shaped or small "loose" items for storage, shipping or inventory. Here's how:

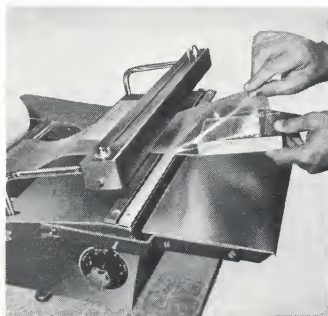

1 Slip item(s) in tubing

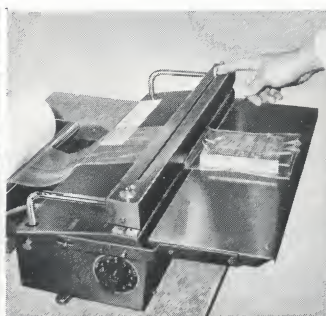

2 Seal and cut

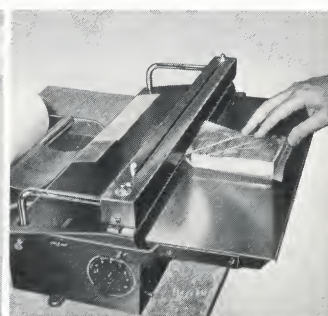

3 turn and seal other (open) end

Cuts down on shortage claims, insures the right item goes to the right place! Transparency allows quick, easy identification, while packing slip, invoice, label or tag can be visibly sealed in.

Makes inventory control so easy, too. Count individual items only once! Suppose, for example, you use #4 elbow brackets 50 at a time. So count them once in lots of 50, put them in transparent bags. When you need them get them, in neat lots of 50 — no need to count again! And at inventory time count bags, not brackets!

Inventory is a daily problem, too. Take re-orders: only 6 bags of brackets left? That's enough for only 6 jobs. Don't count, just re-order!

Factory warehouses in San Francisco, New York and Montreal.

	9" MODEL	16½" MODEL	23" MODEL
SUPER SEALMASTER with workshelf and rolloflux, as shown.	CAT. # 230PC	CAT. # 420PC	CAT. # 580PC
SHIPPING WEIGHT	35 lbs.	48 lbs.	55 lbs.

In general, we recommend purchasing a sealer for the width of bag you most commonly seal. But if your needs vary too much, or if you wish to prepare now for sealing bigger bags later, you can obtain a sealer prepared for two sealing lengths. Interchangeable sealing bars help you control the sealing length on the following

combination models 420/230 Sealing Length 16½" and 9"  
580/230 Sealing Length 23" and 9"  
580/420 Sealing Length 23" and 16½"

Added advantage of combination models: longer lifespan of sealing bars, less maintenance.



**Cut shortage claims, losses, shipping expense!**  
**Ship parts in ...**

## **“Write-on” Plastic Parts Bags**

**Make them yourself to any length desired from**  
**...PREPRINTED POLY TUBING.**





5" x 7" bag easily handles 10 lbs.

Make your own parts shipping bags from this strong, transparent *preprinted poly tubing*. The bold red message: **Do not throw away ... it contains part of your order.** Just below the message is the “contents” blank. Here, a specially prepared surface lets you write in the actual contents—right on the plastic surface—whenever you’re ready to pack. **Strong** ... parts simply can’t “escape” this extra-heavy duty polyethylene. And punching a hole in it would take real, conscious effort! **Flexible** ... the tubing is 5" wide, but since you make these bags yourself, they can be any length you please. (Imprints are at 4½" intervals.) **Practical** ... transparency prevents accidental throwaway even when somebody misses the big red warning. Helps with inventory control, too.



Bright red message, and transparency, prevent accidental throw-away. “Write-on” surface lets you write in contents.

Any Audion Impulse Sealer (with knife) may be used to make “Write-on” Plastic Parts Bags. For this purpose however, we recommend the shorter sealing lengths. Below: one example.

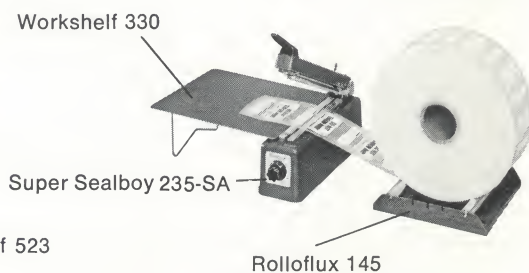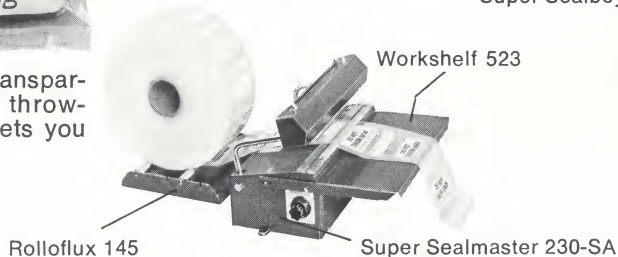

Above: another example of Audion equipment appropriate for making “write-on” Plastic Parts Bags.



### **“Write-on” Plastic (Poly) Parts Tubing**

STOCK NO.	WIDTH	THICKNESS	ROLL LENGTH	WEIGHT PER ROLL
5W0	5"	.004"	1250'	20 lbs.



# STOCKLIST

## Clear, seamless lay-flat POLYETHYLENE TUBING

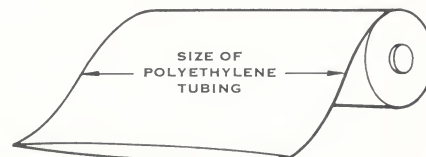

STOCK NO.	SIZE	THICK-NESS	FEET PER ROLL	WT. PER ROLL	PRICE PER LB.	SHIP-ING POINT*	STOCK NO.	SIZE	THICK-NESS	FEET PER ROLL	WT. PER ROLL	PRICE PER LB.	SHIP-ING POINT*	STOCK NO.	SIZE	THICK-NESS	FEET PER ROLL	WT. PER ROLL	PRICE PER LB.	SHIP-ING POINT*
1CT	1"	.002	1700	2.6		EW	8AT	8"	.0015	4000	38.4		E	18AT	18"	.0015	4800	86.4		E
1 1/2AT	1 1/2"	.0015	2250	3.9		E	8CT	8"	.002	3000	38.4		EW	18CT	18"	.002	3000	86.4		EW
1 1/2CT	1 1/2"	.002	1700	3.9		EW	8FT	8"	.003	2000	38.4		E	18FT	18"	.003	2000	86.4		E
1 1/2KT	1 1/2"	.006	560	3.9		E	8DT	8"	.004	1500	38.4		EW	18DT	18"	.004	1500	86.4		EW
1 3/4AT	1 3/4"	.0015	2250	4.6		E	8KT	8"	.006	1000	38.4		EW	18GT	18"	.005	1200	86.4		E
2AT	2"	.0015	4000	9.6		E	8 1/2CT	8 1/2"	.002	3000	40.8		E	18KT	18"	.006	1000	86.4		E
2CT	2"	.002	3000	9.6		EW	9BT	9"	.001	6000	43.2		E	18HT	18"	.008	750	86.4		E
2FT	2"	.003	2000	9.6		E	9NT	9"	.00125	4800	43.2		E	18XT	18"	.010	600	86.4		W
2FT	2"	.004	1500	9.6		E	9AT	9"	.0015	4000	43.2		EW	19NT	19"	.00125	4800	91.2		E
2GT	2"	.005	1200	9.6		E	9CT	9"	.002	3000	43.2		E	19CT	19"	.002	3000	91.2		E
2KT	2"	.006	1000	9.6		E	9FT	9"	.003	2000	43.2		EW	19 1/4NT	19 1/4"	.00125	4800	92.4		W
2 1/4AT	2 1/4"	.0015	4000	10.8		E	9DT	9"	.004	1500	43.2		EW	20BT	20"	.001	6000	96.0		E
2 1/4CT	2 1/4"	.002	3000	10.8		E	9KT	9"	.006	1000	43.2		EW	20NT	20"	.00125	4800	96.0		EW
2 1/2AT	2 1/2"	.0015	4000	12.0		E	9 1/4NT	9 1/4"	.00125	4800	44.4		W	20AT	20"	.0015	4000	96.0		E
2 1/2CT	2 1/2"	.002	3000	12.0		EW	9 1/2AT	9 1/2"	.0015	4000	45.6		E	20CT	20"	.002	3000	96.0		EW
2 1/2DT	2 1/2"	.004	1500	12.0		E	9 1/2CT	9 1/2"	.002	3000	45.6		E	20FT	20"	.003	2000	96.0		E
2 3/4AT	2 3/4"	.00125	4800	13.2		E	10BT	10"	.001	6000	48.0		E	20DT	20"	.004	1500	96.0		EW
2 3/4NT	2 3/4"	.0015	4000	13.2		E	10NT	10"	.00125	4800	48.0		E	20KT	20"	.006	1000	96.0		E
2 3/4CT	2 3/4"	.002	3000	13.2		E	10AT	10"	.0015	4000	48.0		E	21NT	21"	.00125	4800	100.8		W
3NT	3"	.00125	4800	14.4		E	10CT	10"	.002	3000	48.0		EW	21FT	21"	.003	2000	100.8		E
3AT	3"	.0015	4000	14.4		E	10FT	10"	.003	2000	48.0		E	22NT	22"	.00125	4800	105.6		W
3CT	3"	.002	3000	14.4		EW	10DT	10"	.004	1500	48.0		EW	22CT	22"	.002	3000	105.6		EW
3FT	3"	.003	2000	14.4		E	10KT	10"	.006	1000	48.0		EW	22DT	22"	.004	1500	105.6		E
3DT	3"	.004	1500	14.4		EW	10 1/2FT	10 1/2"	.003	2000	50.4		E	23 1/4NT	23 1/4"	.00125	4800	111.6		W
3GT	3"	.005	1200	14.4		E	11NT	11"	.00125	4800	52.8		E	24BT	24"	.001	6000	115.2		E
3KT	3"	.006	1000	14.4		EW	11CT	11"	.002	3000	52.8		W	24NT	24"	.00125	4800	115.2		EW
3 1/4CT	3 1/4"	.002	3000	15.6		E	11FT	11"	.003	2000	52.8		E	24AT	24"	.0015	4000	115.2		E
3 1/2NT	3 1/2"	.00125	4800	16.8		E	11DT	11"	.004	1500	52.8		E	24CT	24"	.002	3000	115.2		EW
3 1/2CT	3 1/2"	.002	3000	16.8		EW	11 1/4NT	11 1/4"	.00125	4800	54.0		W	24FT	24"	.003	2000	115.2		EW
3 1/2FT	3 1/2"	.003	2000	16.8		E	12BT	12"	.001	6000	57.6		E	24GT	24"	.004	1500	115.2		EW
3 3/4NT	3 3/4"	.00125	4800	18.0		E	12NT	12"	.00125	4800	57.6		EW	24KT	24"	.006	1000	115.2		E
4BT	4"	.001	6000	19.2		E	12AT	12"	.0015	4000	57.6		E	25AT	25"	.0015	4000	120.0		E
4AT	4"	.0015	4000	19.2		E	12CT	12"	.002	3000	57.6		EW	25CT	25"	.002	3000	120.0		E
4CT	4"	.002	3000	19.2		EW	12FT	12"	.003	2000	57.6		E	26CT	26"	.002	3000	124.8		EW
4ET	4"	.0025	2400	19.2		E	12DT	12"	.004	1500	57.6		EW	26FT	26"	.003	2000	124.8		EW
4FT	4"	.003	2000	19.2		E	12KT	12"	.006	1000	57.6		EW	26DT	26"	.004	1500	124.8		E
4DT	4"	.004	1500	19.2		EW	12XT	12"	.010	600	57.6		W	26KT	26"	.006	1000	124.8		E
4GT	4"	.005	1200	19.2		E	13BT	13"	.001	6000	62.4		E	26 1/4NT	26 1/4"	.00125	4800	126.0		W
4KT	4"	.006	1000	19.2		EW	13NT	13"	.00125	4800	62.4		E	27 1/4NT	27 1/4"	.00125	4800	130.8		W
4XT	4"	.010	600	19.2		W	13CT	13"	.002	3000	62.4		E	28CT	28"	.002	3000	134.4		W
4 1/2NT	4 1/2"	.00125	4800	21.6		E	13FT	13"	.003	2000	62.4		E	28DT	28"	.004	1500	134.4		W
4 1/2CT	4 1/2"	.002	3000	21.6		EW	13DT	13"	.004	1500	62.4		E	28GT	28"	.005	1200	134.4		E
4 1/2ET	4 1/2"	.0025	2400	21.6		E	13GT	13"	.005	1200	62.4		E	29 1/4NT	29 1/4"	.00125	4800	140.4		W
4 1/2FT	4 1/2"	.003	2000	21.6		E	13 1/4NT	13 1/4"	.00125	4800	63.6		W	30CT	30"	.002	3000	144.0		EW
4 1/2DT	4 1/2"	.004	1500	21.6		E	13 3/4CT	13 3/4"	.002	3000	66.0		E	30FT	30"	.003	2000	144.0		EW
5BT	5"	.001	6000	24.0		E	14BT	14"	.001	6000	67.2		E	30DT	30"	.004	1500	144.0		E
5NT	5"	.00125	4800	24.0		E	14NT	14"	.00125	4800	67.2		EW	32CT	32"	.002	3000	153.6		E
5AT	5"	.0015	4000	24.0		E	14AT	14"	.0015	4000	67.2		E	32FT	32"	.003	2000	153.6		E
5CT	5"	.002	3000	24.0		EW	14CT	14"	.002	3000	67.2		EW	33AT	33"	.0015	4000	158.4		E
5FT	5"	.003	2000	24.0		E	14FT	14"	.003	2000	67.2		E	33CT	33"	.002	3000	158.4		EW
5DT	5"	.004	1500	24.0		EW	14GT	14"	.004	1500	67.2		EW	33DT	33"	.004	1500	158.4		EW
5KT	5"	.006	1000	24.0		EW	15BT	15"	.0001	6000	72.0		E	34AT	34"	.0015	4000	163.2		E
5HT	5"	.008	750	24.0		E	15NT	15"	.00125	4800	72.0		E	35FT	35"	.003	2000	168.0		E
5 1/2BT	5 1/2"	.001	6000	26.4		E	15AT	15"	.0015	4000	72.0		E	36BT	36"	.001	6000	172.8		E
5 1/2AT	5 1/2"	.0015	4000	26.4		E	15CT	15"	.002	3000	72.0		EW	36AT	36"	.0015	4000	172.8		E
5 1/2FT	5 1/2"	.003	2000	26.4		E	15FT	15"	.003	2000	72.0		E	36CT	36"	.002	3000	172.8		E
5 3/4AT	5 3/4"	.0015	4000	27.6		E	15DT	15"	.004	1500	72.0		EW	36FT	36"	.003	2000	172.8		E
6BT	6"	.001	6000	28.8		E	15GT	15"	.005	1200	72.0		E	36DT	36"	.004	1500	172.8		E
6NT	6"	.00125	4800	28.8		E	15KT	15"	.006	1000	72.0		E	36GT	36"	.005	1200	172.8		E
6AT	6"	.0015	4000	28.8		E	15 1/4NT	15 1/4"	.00125	4800	73.2		W	38CT	38"	.002	3000	182.4		EW
6CT	6"	.002	3000	28.8		EW	16BT	16"	.001	6000	76.8		E	38FT	38"	.003	2000	182.4		EW
6FT	6"	.003	2000	28.8		E	16NT	16"	.00125	4800	76.8		EW	38DT	38"	.004	1500	182.4		EW
6DT	6"	.004	1500	28.8		EW	16AT	16"	.0015	4000	76.8		E	38GT	38"	.005	1200	182.4		E
6GT	6"	.005	1200	28.8		E	16CT	16"	.002	3000	76.8		E	38KT	38"	.006	1000	182.4		E
6KT	6"	.006	1000	28.8		EW	16FT	16"	.003	2000	76.8		E	40CT	40"	.002	1700	104.0		EW
6 3/4BT	6 3/4"	.001	6000	32.4		E	16DT	16"	.004	1500	76.8		E	48FT	48"	.003	1125	124.8		E
7BT	7"	.001	6000	33.6		E	16KT	16"	.006	1000	76.8		E	48DT	48"	.004	850	124.8		W
7NT	7"	.00125	4800	33.6		E	17FT	17"	.003	2000	81.6		E	54CT	54"	.002	1700	140.4		E
7AT	7"	.0015	4000	33.6		E	17 1/4NT	17 1/4"	.00125	4800	82.8		W							
7CT	7"	.002	3000	33.6		EW	18BT	18"	.001	6000	86.4		E							
7ET	7"	.0025	2400	33.6		E	18NT	18"	.00125	4800	86.4		EW							
7FT	7"	.003	2000	33.6		E														
7DT	7"	.004	1500	33.6		EW														
7KT	7"	.006	1000	33.6		EW														

\*Shipping points:

E East coast warehouse up-state New York.

W West coast warehouse Los Angeles.

Prices are f.o.b. shipping point, depending upon availability, and subject to change without prior notice.

Minimum order one roll. All weights and footage per roll are approximate. Delivery, as a rule, takes place within 2-6 working days. All tubing is prime virgin polyethylene, FDA approved and will meet mil. spec. LP 378-A.


Poly gauge sample book will be sent upon request.

**A J & M ASSOCIATES**

5180 Meridian Ave.  
San Jose, CA 95118  
(408) 723-3701

Standard power input all AUDION models: 110 volt AC, single phase, 60 cycle.  
Special voltage available upon request.

Factory warehouses in San Francisco, New York and Montreal.

All AUDION impulse sealers shipped from Montreal warehouse are  approved.